



Global Architectural Openings Solutions

**Fire Rated
European Mortise
Escape Locks**

P Series



Contact us:
+44 - 741 5132931
info@gaos-hwd.co.uk
Unit1, Baxter Road
Sheffield S61JF
United Kingdom

P Series Panic Exit Mortise Locks:

Product Summary:

GAOS locks provide significant advantages due to their guaranteed high quality, reliable functionality, and long service life. Built with premium materials, precise manufacturing, and a robust quality management system, these locks meet all technical standards. Complying with DIN 18251 and EN 12209, GAOS locks deliver comprehensive safety and convenience benefits, with dependable and advanced features included as standard. In addition to the locks designed specifically for the UK and European markets, GAOS also offers a range of customized, country-specific lock solutions worldwide.

Product Details:

PD72 Panic Exit Lock

Specifications:

- Panic function
- Key to unlock
- Non-handed
- Without strike plate
- In unlocked position

Latch bolt is operated from both sides by lever handle/key action.

- In locked position


Inside lever handle retracts latch and dead bolt simultaneously

- Deadbolt operated by key from outside

- Compliance with:

- A) EN12209
- B) EN179
- C) EN1125

PD72 - Panic Lock

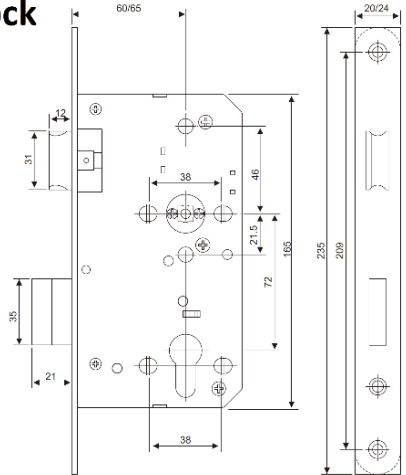

PE72 Panic Exit Lock:

Specifications:

- Panic function
- Key action on latch bolt.
- Single throw dead bolt.
- Non-handed.
- Without strike plate.
- In unlocked position

Latch bolt is operated from both sides by lever handle/key action

- In locked position

Inside lever handle retracts latch and dead bolt simultaneously;


Outside lever handle retracts latch bolt only.

Dead bolt operated by cylinder key.

- Compliance with:

- A) EN12209
- B) EN179

PE72 - Panic Lock

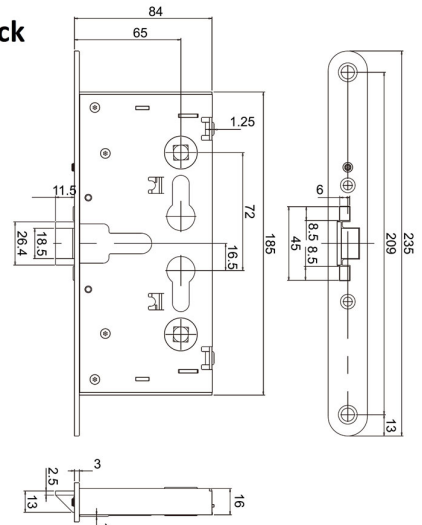

PB72 Classroom Lock:

Specifications:

- Panic function
- Key action on latch bolt
- Two-piece follower
- Without strike plate
- In unlocked position

Latch bolt is operated from both sides by lever handle/key action.

- In locked position

No operation of latch bolt from the outside.

Operation of latch bolt from the inside handle

- Compliance with:

A) EN12209

B) EN179

PB72 - Panic Lock

